



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification 5 :

H01M 10/48

A1

(11) International Publication Number:

WO 92/22099

(43) International Publication Date:

10 December 1992 (10.12.92)

(21) International Application Number: PCT/US92/04213

(22) International Filing Date: 19 May 1992 (19.05.92)

(30) Priority data:

710,421

5 June 1991 (05.06.91)

US

(71) Applicant: MOTOROLA, INC. [US/US]; 1303 E. Algonquin Road, Schaumburg, IL 60196 (US).

(72) Inventors: BURNS, Arthur, G. ; 955 N.W. 79 Terrace, Plantation, FL 33324 (US). MURI, David, L. ; 2355 N.W. 110 Terrace, Sunrise, FL 33322 (US).


(74) Agents: NICHOLS, Daniel, K. et al.; Motorola, Inc., Intellectual Property Dept., 8000 West Sunrise Blvd., Ft. Lauderdale, FL 33322 (US).

(81) Designated States: AT (European patent), BE (European patent), CH (European patent), DE (European patent), DK (European patent), ES (European patent), FR (European patent), GB (European patent), GR (European patent), IT (European patent), JP, LU (European patent), MC (European patent), NL (European patent), SE (European patent).

Published

*With international search report.**Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.*

(54) Title: BATTERY PACKAGE HAVING A COMMUNICATION WINDOW

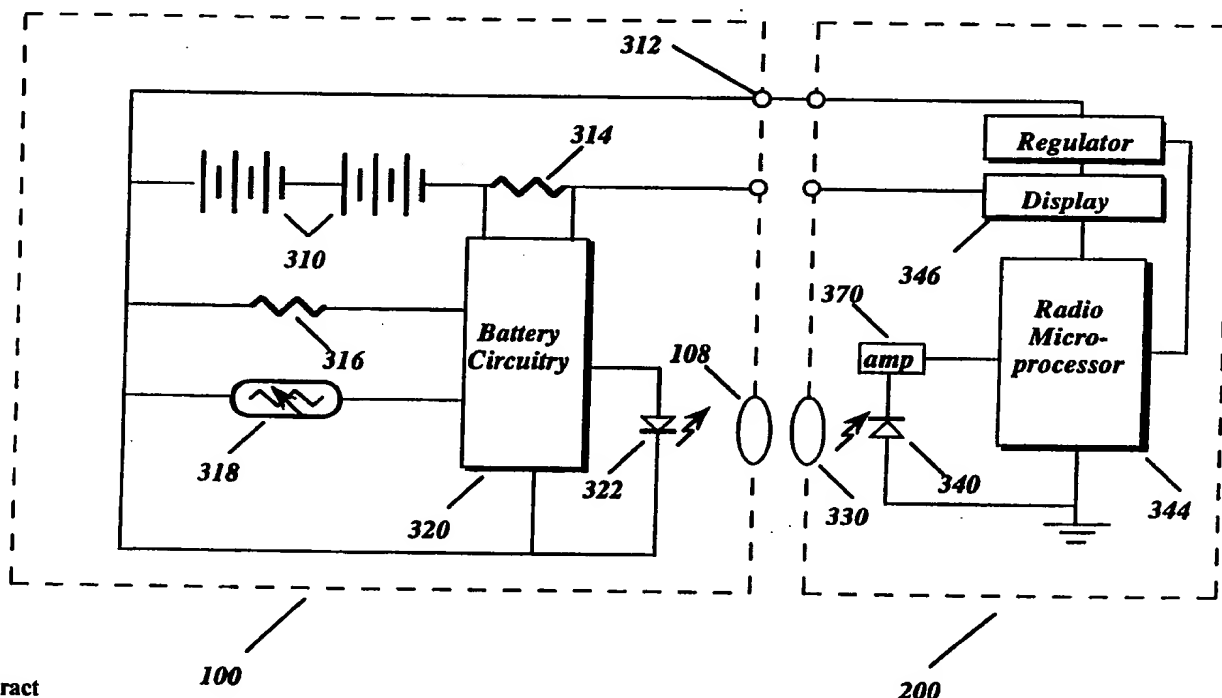

(57) Abstract

A battery package (100) includes a transparent window (108) which communicates information about the battery to a battery-powered device such as a portable radio (200). Information about the battery (100) is communicated through the window (108) by a series of light pulses, and is received by a light sensor (340) in the radio. The information is processed by the radio micro-processor (344) and the status of the battery (100) is displayed on the radio display (346). The window (108) is gas permeable and water impermeable, serves as a vent for the battery housing (110) and also as an optical data transmission window.

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AT	Austria	FI	Finland	MI	Mali
AU	Australia	FR	France	MN	Mongolia
BB	Barbados	GA	Gabon	MR	Mauritania
BE	Belgium	GB	United Kingdom	MW	Malawi
BF	Burkina Faso	GN	Guinea	NI	Netherlands
BG	Bulgaria	GR	Greece	NO	Norway
BJ	Benin	HU	Hungary	PL	Poland
BR	Brazil	IE	Ireland	RO	Romania
CA	Canada	IT	Italy	RU	Russian Federation
CF	Central African Republic	JP	Japan	SD	Sudan
CG	Congo	KP	Democratic People's Republic of Korea	SE	Sweden
CH	Switzerland	KR	Republic of Korea	SN	Senegal
CI	Côte d'Ivoire	LI	Liechtenstein	SU	Soviet Union
CM	Cameroon	LK	Sri Lanka	TD	Chad
CS	Czechoslovakia	LU	Luxembourg	TG	Togo
DE	Germany	MC	Monaco	US	United States of America
DK	Denmark	MG	Madagascar		
ES	Spain				

1

5

10

BATTERY PACKAGE HAVING A COMMUNICATION WINDOW

15

Technical Field

20 This invention relates to batteries for portable radios and other battery powered devices and more particularly to batteries having a gas vent.

Background

25 A battery is coupled to a portable battery powered device to provide electrical energy to the device. Many devices use primary batteries which are single cell batteries designed to be discharged one time and then replaced. Another technology widely used is that of rechargeable batteries. These batteries are typically combinations of individual
30 battery cells connected together in series or parallel and placed into a package. The package is fixtured such that it is easily connected and disconnected to the battery powered device, and so that it may be recharged once the electrical energy is used.

One problem inherent to battery powered devices is that the battery has a finite life and as the battery energy nears total depletion, the operation of the battery powered device becomes affected in a negative manner, eventually ceasing to operate. At this point, the battery is typically recharged by removing the battery from the device and placing it in a battery charger. In order to properly charge the battery, the charger must deliver the correct amount of current to the battery over a period of time. If the charger delivers too little current, the battery may not become fully charged. Conversely, if the charger delivers too much current, the battery will become overcharged, overheated, and damaged. Many rechargeable battery packages have some means of sensing the degree of charge of the battery during this operation. This is accomplished by such items as thermistors (for battery temperature measurement) and coding resistors (whose value can identify the proper charge rate and control method). The sensing circuitry can also be used to communicate the condition of the battery to the battery powered device.

U.S. Patent No. 4,680,527 describes an electrical battery with a current sensing system used to monitor the magnitude of current drawn from the battery during operation. In one embodiment, a total of eight contacts are present on the battery. The contacts and associated interconnection increase the complexity of the battery. Each contact requires a penetration through the housing wall and, thus, is a potential source of moisture intrusion.

In addition, a vent must be provided in the battery housing in order to equalize atmospheric pressure changes to prevent the otherwise waterproof, airtight, sealed housing from "ballooning" and to allow any cell vented gasses (hydrogen, oxygen) from accumulating which could result in an explosion hazard. Vents have two major functions: waterproofing and gas permeability. These vents have been made from a number of materials such as sintered metal, one-way flapper valves, and breathable material such as GORE-TEX®. Adding such a vent requires an additional hole in the housing and

adds an additional cost and manufacturing step to the battery package.

It would also be highly desirable to be able to monitor other functions and parameters of the battery, such as the number of charge/discharge cycles, the capacity rating of the battery, temperature of the battery, the amount of capacity remaining in the battery, the type of battery chemistry, and so forth. In order to communicate each of these parameters to a charger or battery powered device using existing technology, each parameter would require an individual contact in the housing. It may be easily seen that the number of contacts in a housing quickly rises to an unmanageable number if one were to monitor all functions of the battery. If one desires to limit the number of contacts and electrically multiplex on a few lines within the radio and battery, spurious signals could readily result and interfere with the radio operation.

Clearly, an improvement is needed that will provide for a method of monitoring many of these battery parameters while, at the same time, communicating them to a charger or a battery powered device. In addition, a method of venting the battery that does not require an additional vent hole is also desirable.

Summary of the Invention

Briefly, according to the invention, there is provided a battery package comprising a housing with a transparent window. An energy storage device is contained within the housing and a communications means transmits information through the transparent window.

In a further aspect of the invention, the transparent window is a gas permeable membrane that also functions as a window for communicating information by a light signal. The window acts as a vent to allow the interior of the battery housing to be maintained at the same pressure as the exterior environment.

In still another aspect of the invention, the battery package and a battery powered device such as a radio are coupled together. The

battery communicates information to a portable radio via a light signal through a window in the battery housing. The operation of the radio may be modified based on information transmitted from the battery.

5 **Brief Description of the Drawings**

FIG. 1 is an isometric view of a battery package in accordance with the invention.

FIG. 2 is an elevational view of the battery coupled to a portable radio.

10 FIG. 3 is a bottom view of the radio, showing the electrical contacts.

FIG. 4 is an electrical schematic of the battery and radio circuitry.

15 FIG. 5 is an electrical schematic showing details of the schematic of FIG. 4.

Detailed Description of the Preferred Embodiment

Referring now to FIG. 1, a perspective view of one embodiment of a battery in accordance with the present invention is shown. Battery
20 100 includes a housing 110 made of a material having a substantial structural integrity such as polycarbonate, for example, which is sufficiently durable to protect battery cells which are housed therein. Battery housing 110 includes an external surfaces 115 and 120 on which electrical contacts 102 and 106 are situated. Contacts 102 are
25 electrical contacts which permit the battery to interface with and couple to a battery powered device (not shown). Contacts 106 are electrical contacts which permit the battery to interface and couple to a battery charger (not shown). An example of a battery powered device that is connectable to battery 100 is shown in FIG. 2. In this instance,
30 the battery powered device 200 is a portable radio. FIG. 3 shows a bottom view of the electrical contacts of portable radio 200. Electrical contacts 202 are configured so as to mate with and couple to the electrical contacts 102 of the battery. Although the term radio or portable radio is employed throughout this text, those skilled in the art

will realize that these contacts are usable to couple battery 100 to any power consuming device in addition to portable radios. In this invention, particularly applicable to portable radios and rechargeable batteries, contacts 102 and 202 couple the battery to the radio and
5 contacts 106 couple the battery to a battery charger.

Referring back to FIG. 1, the battery housing 110 contains a communication port 108 in one of the exterior surfaces 120. The communications port or multifunctional window serves as a port to provide information about the battery type, the battery capacity, the
10 state of charge of the battery, the number of charge/discharge cycles, the temperature of the battery, the size of the battery and other parameters. Communications ports 108 also serves as a vent to release excess pressure from the interior of the housing 110. If excess pressure is generated during the charge/discharge cycle, gas is vented
15 from the battery cells. For sealed, watertight batteries, pressure differentials between the interior of the housing 110 and the ambient atmosphere are also experienced when, for example, batteries are taken in airplanes or to higher mountain altitudes, and also upon returning to ambient. It is important to equalize the pressure inside
20 the housing with that of the ambient environment in order to prevent the housing from bowing or collapsing.

In order to provide a communication port 108 that serves as both a vent and a communications port for optical data transmission, a window material should be permeable to gas, transparent to light, and
25 impermeable to water and other fluids. It is often desirable, for example, to seal the battery housing against intrusion from moisture. Materials useful as a combination vent and communications port are silicone polymers, polytetrafluoroethylene films (TEFLON®), and materials used in the manufacture of gas permeable contact lenses.
30 These lenses are typically acrylic ester polymers and copolymers. For further information and detail in the chemistry of the contact lens material copolymers, the reader is referred to U.S. Patent Nos. 4,652,622 and 4,355,147 by Deichert et al. and Re-Issue No. 31,406 by Gaylord. These patents are incorporated herein by reference. These

materials may be cast into a rigid form and machined into the desired configuration, and have higher gas permeability in comparison to conventional contact lens materials. For example, a copolymer comprising thirty-five parts pentamethyldisiloxanlmethyl
5 methacrylate and sixty-five parts methyl methacrylate has an oxygen permeability of 500 cc-mil/100 sq.in/24 hrs/atmosphere compared to an oxygen permeability of about thirty-four (34) for polymethylmethacrylate and thirteen (13) for polyhydroxlmethacrylate. By modifying the chemistry of the copolymers, oxygen permeability values as high
10 as seven hundred sixty-five (765) may be obtained. These values are within the range to be useful as gas vents for battery housing.

Since the communications port 108 is optically transparent to light, a non-contact communication may be made between the battery 100 and battery powered device 200. This eliminates the need for an
15 additional electrical contact and a difficult-to-seal contact in the housing. Optical communications may be made by the use of a simple emitter such as a light emitting diode (LED) in the battery 100 and a photodiode sensor in the radio 200. Multiplexing the light signals through a single port provides the advantage of communicating a
20 great deal of information while only making a single opening in the housing. In the prior art, many connections and openings are required to communicate the same amount of information, typically one for each piece of information. Other types of light signals may be used that operate outside the visible spectrum, for example, infrared
25 transmitters and sensors or ultraviolet transmitters and sensors.

Referring now to FIG. 4, battery 100 contains one or more battery cells 310 connected either in series, parallel, or a combination of series and parallel. The cell or battery is mated with an electrical connection 312 and also is coupled to a variety of circuitry such as sensing
30 resistors 314, coding resistor 316, thermister 318 (used to measure temperature), and additional battery circuitry used to encode the information obtained from the sensors. The encoded information is transmitted in the form of digital or analog light signals via a transmit LED 322 through the multifunction window 108. The light

pulses transmitted through window 108 are received by a photodetector 340 mounted in the battery powered device or radio. A multifunction window 330 may be used if the radio requires weather tight sealing or the receive photodetector 340 may be mounted in the radio case. The

5 receive photodetector 340 typically consists of a photodiode. The signal received from the photodiode is fed into the radio microprocessor 344 and the microprocessor output is displayed on the radio display 346. Examples of battery parameters that may be communicated to the

10 radio are: battery voltage, battery temperature, battery type, battery capacity remaining, the immediate current in the battery, the number of charge/discharge cycles, and information on faulty conditions resident in the battery. This information may also be displayed easily on the radio display. Referring now to FIG. 5, a more detailed

15 electrical schematic of the battery shows the makeup of the battery circuitry 320. An analog-to-digital converter 350 converts the analog signals obtained from the sensors. The digital signal is fed into a controller 360 that modulates the signal, producing a signal that is a series of electrical pulses. In FIG. 4, the signal is fed to the LED 322

20 which converts the electrical pulses into light pulses and which are transmitted through the multifunction window 108. After the light signals are received by the receiving photodiode 340 in the radio, they are amplified by an amplifier 370 and the data is converted into useful information by the radio microprocessor 344 and communicated to the radio display 346.

25 The advantage of using the above methodology in a battery-radio hookup is that the microprocessor necessary to manipulate the data and convert it into a useful signal is placed in the radio. Typically, this microprocessor already exists in radios and simply requires additional programming to monitor and convert these signals into

30 useful information. By utilizing the radio microprocessor 344, an additional microprocessor is not needed in the battery. This is very important because each portable radio may have several batteries that are used from time to time with the radio, depending upon battery size and the state of charge of the battery. By utilizing the microprocessor

in the radio, the manufacturing cost and complexity of the battery is reduced significantly.

The information is converted into data words and transmitted from the battery to the radio in pulses. One data word is transmitted approximately every second. The LED is on approximately three tenths of a percent (0.3%) of the time. Assuming a ten milliampere peak LED current, this yields an average thirty microampere current which equals about 0.72 milliampere hours per day. For reliability and cost factors, the protocol used between the battery monitoring process and the radio microprocessor or the host processor needs to be as simple as possible. By providing a protocol that has very loose timing specifications, complex equipment and high processor loading can be avoided. In an example of a typical protocol, the messages transmitted from the battery are composed of two parts: a command and an argument field. There are six possible commands, each with its own argument. The simplest protocol is to send a number of pulses indicating the command and, after a brief amount of time, approximately two milliseconds, another set of pulses for the argument. Battery status is updated every few seconds and commands are transmitted any time the radio is turned on.

	<u>Command</u>	<u>Argument</u>	<u>Information</u>
25	Battery Voltage	1 Pulse	6-8 Volts
	Current	2 Pulses	20 ma - 3 amps Log scale
30	Present Battery Capacity	3 Pulses	<20%, 40%, 60%, 80%, 100%
	Max. Battery Capacity	4 Pulses	Defined Battery Sizes
	Battery Technology	5 Pulses	Defined Battery Types
	Battery Problem	6 Pulses	Shorted Cell, Over/Under temp.
35	Battery Temperature	7 Pulses	Battery temperature indicator
	Battery Cycle Counter	8 Pulses	Charge/Discharge cycle counter

In another embodiment of the invention, the battery may also communicate information to a battery charger via a similar communications port. The circuitry and sensors in the battery to communicate information to the charger are similar to those used to communicate information to the radio and the circuitry in the charger is similar to that utilized in the radio. Typically, a second set of contacts is used to charge the battery and a second communications port would also be used. During the charging cycle, the charger queries the battery as to the status of the battery cells and applies the appropriate amount of current and voltage in order to properly charge the battery to one hundred percent completion. Typical schemes employed in the prior art utilize simple methods such as measuring the battery temperature or voltage in order to determine when the battery is fully charged. By monitoring a number of factors in the battery, the battery can be more effectively charged. While the preferred embodiment provides unidirectional communication from the battery, if desired, the communication could be bidirectional allowing the radio or battery charger to transmit data and/or commands to the battery. In that case, light emitters and sensors would be provided in both units.

The examples shown in the figures, while illustrative, are not meant to be considered limiting and other configurations of the invention may be envisioned to fall within the scope of the invention.

What is claimed is:

Claims

1. A battery package, comprising:
a housing having a transparent window;
5 at least one energy storage device contained within the housing;
and
means, coupled to the energy storage device, for communicating
information through the transparent window.
- 10 2. The battery package of claim 1, wherein the transparent
window is gas permeable.
3. The battery package of claim 1, wherein the energy storage
device comprises a battery cell.
- 15 4. The battery package of claim 1, further comprising a means
for sensing the condition of the energy storage device.
5. The battery package of claim 4, wherein the communicating
20 means comprises a light emitter coupled to the sensing means.
6. The battery package of claim 5, wherein the communicating
means further comprises a light sensor for receiving a light signal
from an energy consuming or energy supplying device through the
25 window.

7. A battery charging system, comprising:

A) a battery package adapted for interconnection to a battery charger, comprising;

5 a housing having a window and electrical terminals;
 at least one energy storage device situated in the housing
 and coupled to the electrical terminals; and
 a first means for communicating information through the
 transparent window.

B) a battery charger, comprising;

10 a charger housing having electrical terminals;
 a second means for communicating information, coupled
 to a means for analyzing the information; and
 means, coupled to the analyzing means, for modifying
15 the operation of the charger as a function of the
 information;

C) means for connecting the electrical terminals of the battery
 and charger; and

D) means for coupling the first communicating means and the
20 second communicating means.


8. The battery charging system as described in claim 7, wherein
the window transmits light and is gas permeable.

9. The battery charging system as described in claim 7, further
25 comprising a battery powered device coupled to the battery.



10. A battery monitoring system for use in a portable radio, comprising:

- 5 A) a battery package adapted for interconnection to the radio, comprising;
 a battery housing having a window and electrical terminals
 in at least one of the housing external surfaces;
 at least one battery cell situated in the housing and coupled
 to the electrical terminals;
10 a light emitter situated within the housing so as to transmit
 a light signal through the window to the radio, the signal
 containing information about the battery; and
 means, coupled to the light emitter and contained within the
 housing, or sensing the condition of the battery cell;
- 15 B) a radio, comprising;
 a radio housing having electrical terminals in at least one of
 the housing external surfaces;
 a light sensor coupled to a means for analyzing the light
 signal; and
 means, coupled to the analyzing means, for modifying the
20 operation of the radio as a function of the transmitted
 information;
- C) means for coupling the battery package to the radio;
 D) means for connecting the electrical terminals of the
 multicell battery and radio; and
25 E) means for coupling the light emitter and the light sensor.

1/4

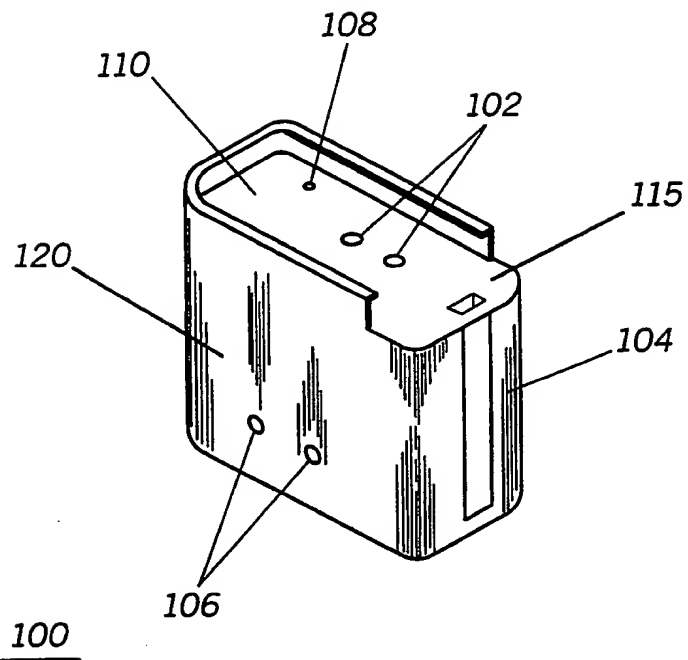**FIG. 1**

2/4

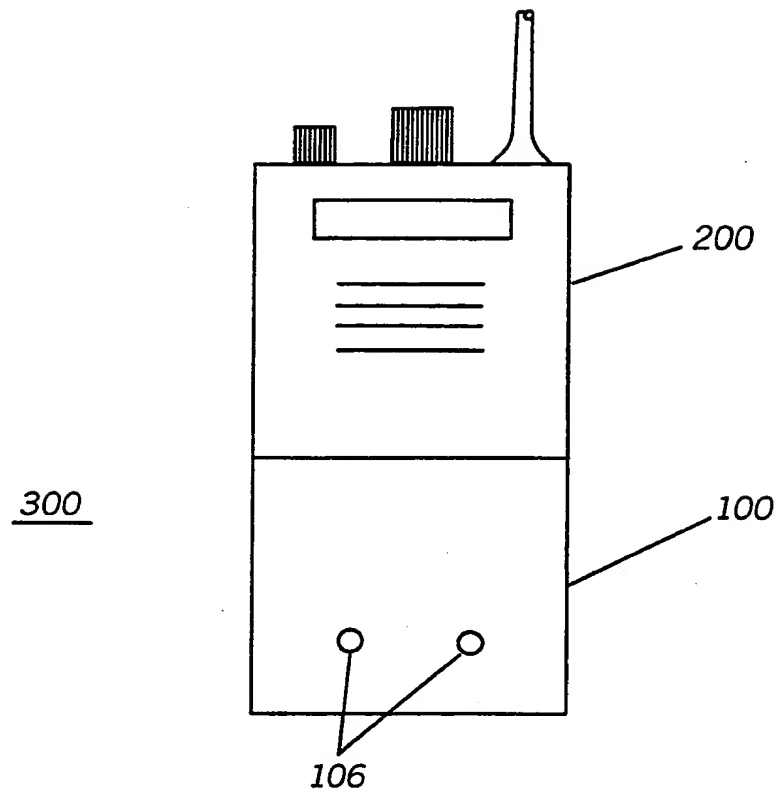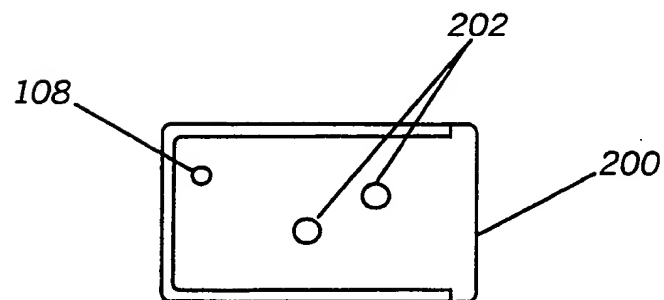**FIG. 2****FIG. 3**

3/4

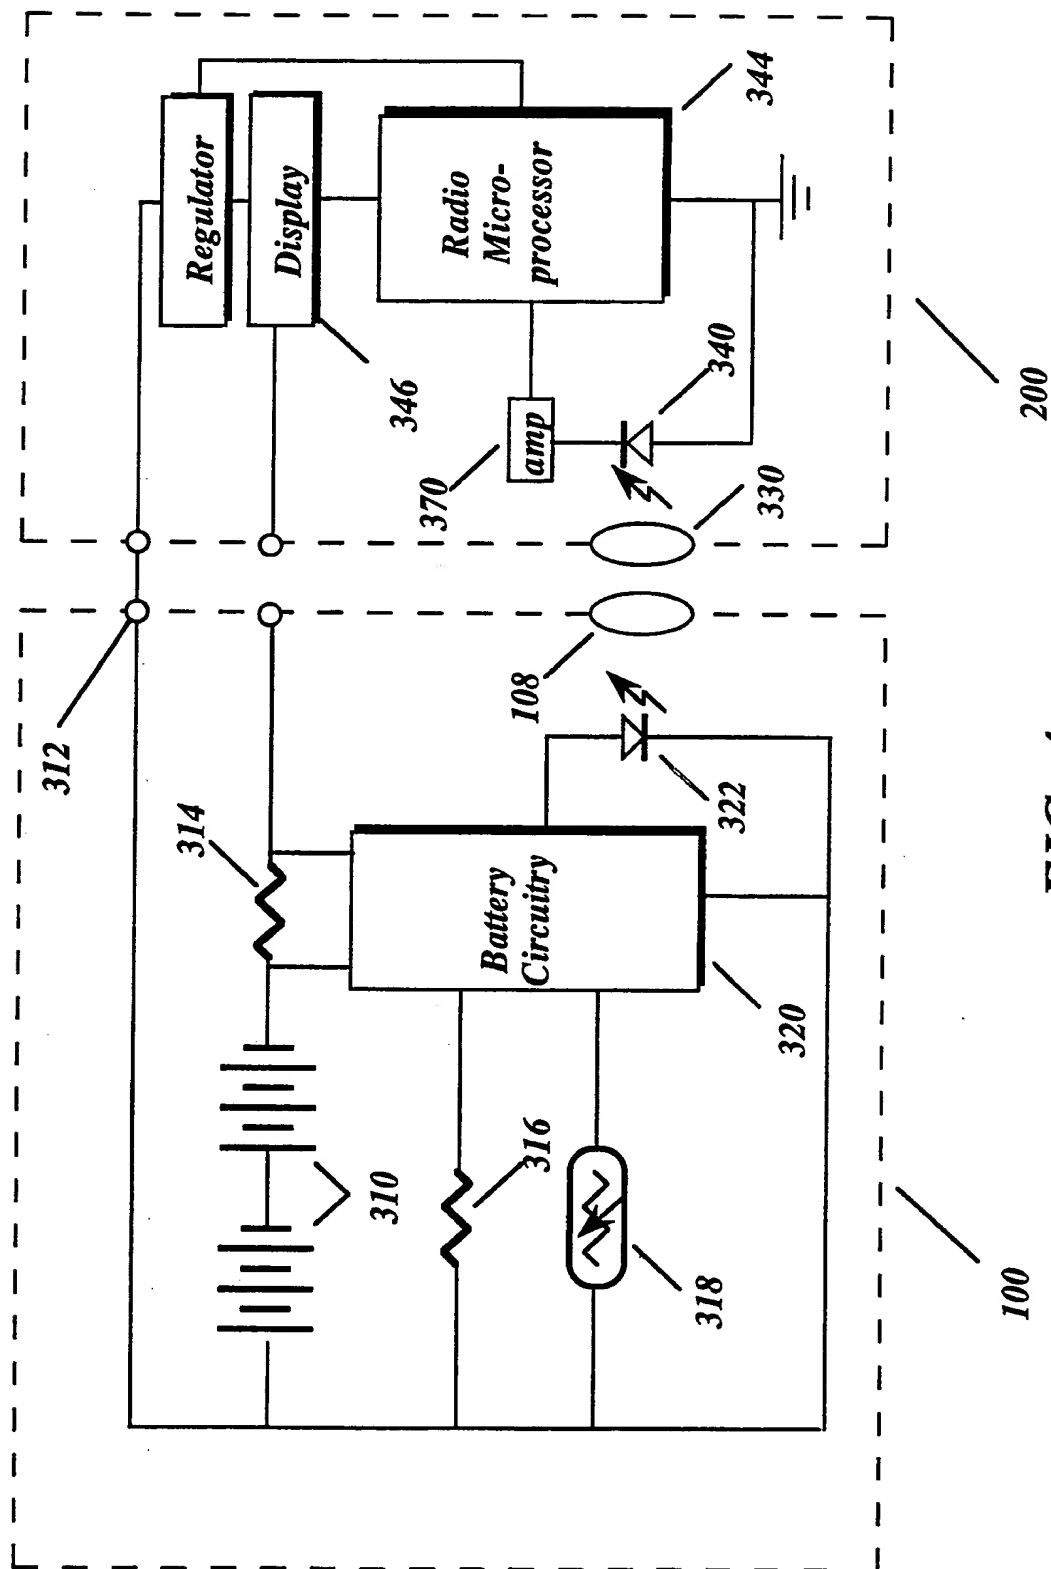
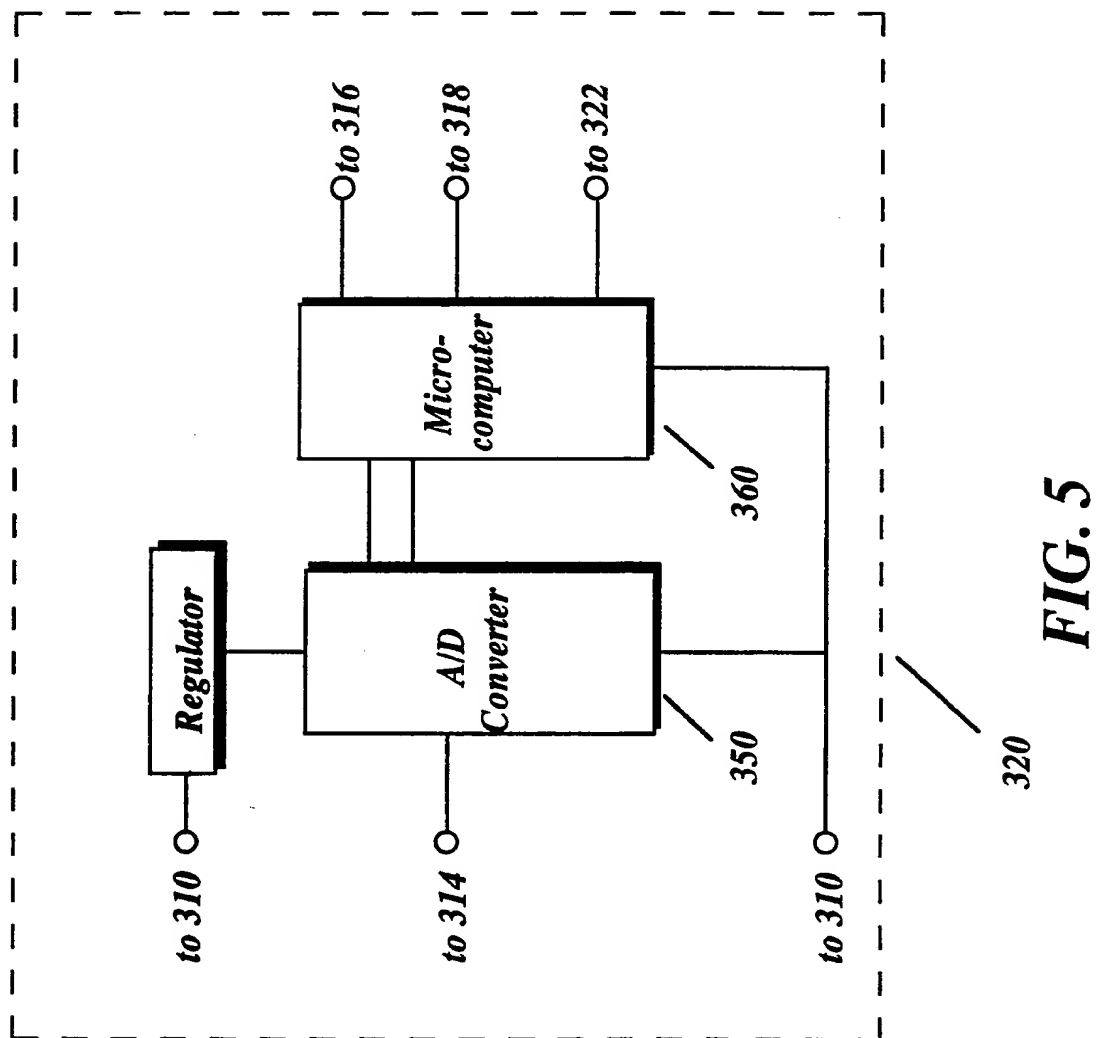


FIG. 4

4/4

**FIG. 5**

INTERNATIONAL SEARCH REPORT

International application No.
PCT/US92/04213

A. CLASSIFICATION AND SUBJECT MATTER IPC(5) :H01M 10/48 US CL :429/7,90,91; 320/48 According to International Patent Classification (IPC) or to both national classification and IPC		
B. FIELDS SEARCHED Minimum documentation searched (classification system followed by classification symbols) U.S. : 429/92,93; 320/2,35,44 Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)		
C. DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US, A, 4,076,906 (JENSEN) 28 February 1978, See col. 1, line 64-col. 2, line 10.	1,3,4
X	US, A, 4,497,881 (BERTOLINO) 05 February 1985, See col. 2, line 35-line 68; Fig. 1.	1,3,4
X	US, A, 4,828,943 (PRITCHARD) 09 May 1989, See Fig. 2, col. 2, lines 10-45; claim 1.	1,3,4
Y	US, A, 4,117,205 (KITAI) 26 September 1978, See col. 3, lines 32-56.	2,8
Y	US, A, 4,310,606 (MAIDA) 12 January 1982, See entire document.	5-7,9,10
Y,P	US, A, 5,057,383 (SOKIRA) 15 October 1991, See entire document.	5-7,9,10
<input type="checkbox"/> Further documents are listed in the continuation of Box C. <input type="checkbox"/> See patent family annex.		
* "A"	Special categories of cited documents: document defining the general state of the art which is not considered to be part of particular relevance	"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
"E"	earlier document published on or after the international filing date	"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
"L"	document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
"O"	document referring to an oral disclosure, use, exhibition or other means	"&" document member of the same patent family
"P"	document published prior to the international filing date but later than the priority date claimed	
Date of the actual completion of the international search 20 AUGUST 1992		Date of mailing of the international search report 07 OCT 1992
Name and mailing address of the ISA/ Commissioner of Patents and Trademarks Box PCT Washington, D.C. 20231 Facsimile No. NOT APPLICABLE		Authorized officer <i>Debbie Wilbur</i> ANTHONY SKAPARS Telephone No. (703) 308-2773

Form PCT/ISA/210 (second sheet)(July 1992)*

THIS PAGE BLANK (USPTO)